



Supplier of Control Instrumentation to the South African Electrical Industry

WEEKLY PROGRAMMABLE ELECTRONIC TIMER



PET — 009

- * **MODEL: PET-009**
- * **Ni-Cd battery included**


SPECIFICATIONS:

Input Voltage	AC 110-120V 60Hz	AC 220-240V 50Hz	DC 24V
Resistive Load	15Amp 1800Watt	13Amp 2850Watt	15Amp

CONTROL OUTPUTS & CONNECTIONS



DIMENSION: UNIT m/m

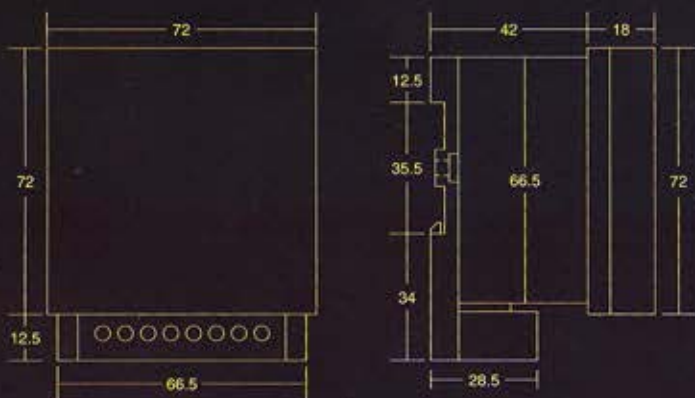


PET — 009

- * **MODEL: PET-010**
- * **Ni-Cd battery included**

SPECIFICATIONS:

Input Voltage	AC 110-120V 60Hz	AC 220-240V 50Hz	DC 24V
Resistive Load	15Amp 1800Watt	13Amp 2850Watt	15Amp

CONTROL OUTPUTS & CONNECTIONS



- * Terminal 3 And 4 Can Be External With Switch. When You Need Timer To Be Turned On At any Time, You Can Turn On The Switch. If You Want To Resume The Pre-Setting Function, You Have To Turn OFF The Switch Of Terminal 3 And 4.

DIMENSION: UNIT m/m

